

TWO WIRE SELF CONTAINED OUTPUT (LOW CURRENT)

Where 2 wire mechanical switches (limit switches) are to be replaced by DC switches without fresh cables, the DC switch must be a two wire switch.

Falls mechanische 2 Draht Schalter durch DC Schalter zu ersetzen sind, (ohne neue Verkabelung) kommen nur 2 Draht DC Schalter in Frage. Ein eingebauter Schalter ermöglicht das Umschalten vom Schliesser auf öffener Kontakt.




Model

NJ 5-18 GM ZO

Feature

5 mm Sensing Range
2 wire DC




Connection Diagram



FLUSH

Metal Housing
PVC Cable 2 m, 0.34mm²
LED, IP-67 Protection
Temperature : -20 to +70°C

Do not connect Proximity switch to AC mains without a load.

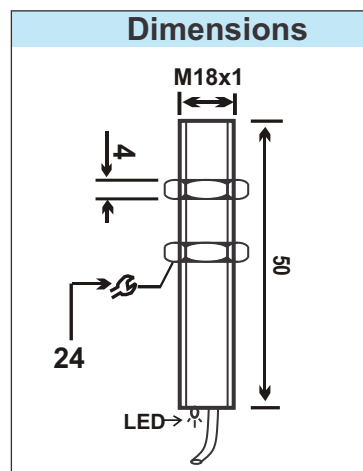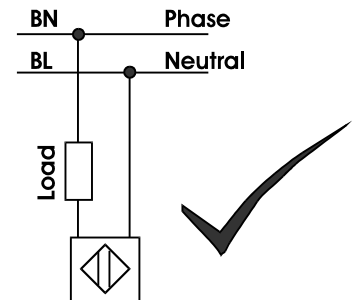

Technical Data

Operating Voltage	5-40 VDC
Assured operat.dist. S a [mm]	0 ...4.05
Continuous Load Current	2- 50 mA
Current Consumption	<1mA
Voltage Drop.	<5V
Standard Target(Ferrous) - mm	18 x 18 x 1
Switching Hysteresis	<5%
Switching Frequency	800Hz
EMC Test	IEC 801

Ordering Chart

TWO WIRE DC(NC) 

NJ 5-18 GM ZO

(Art.No. SID 103 M2)

AS THE MARKET REQUIRES A CONTINUOUS UPDATE / IMPROVEMENT DATA IS SUBJECT TO CHANGE WITHOUT NOTICE.

Osna Electronics Pvt. Ltd. was earlier P and F Electronics P. Ltd., founded in the year 1985 as a joint venture up-to 1990 with M/s. Pepperl + Fuchs GmbH, Germany.